




MX-500S

5-ZONE 19" SELECTIVE MIXING AMPLIFIER

500W raw power in one lump of granite. In an instant, you can create 5 zones which operate independently of each other. They each have their own volume level and selective PA option.

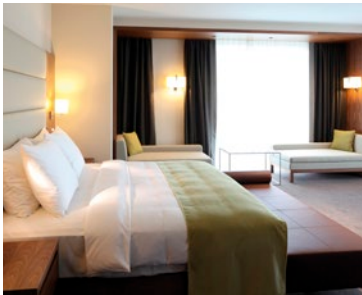

There are four zones in this hotel. Given the size of the number of zones, for example, the lobby, and its use, a large available capacity is required. The MX-500S feels at home here.

output capacity 100V	500W
output capacity RMS 8Ω	500W
frequency range	50Hz - 16kHz
zones	5
direct output	70V / 100V / 4Ω
LED level indicator	yes
tone control	yes (individual)
output	yes (REC)
amp in	yes
pre-amp out	yes
MIC input	4(1)
AUX input	4(1)
tape input	0
chime function	yes
priority levels	5 (evacuation / tel / MIC-318 / MIC / sirene, chime)
power supply	240V AC / 24V DC
power consumption	800W
dimensions (h x w x d)	132 x 484 x 399mm
weight	22kg
accessories	microphone MIC-318 / MIC-511C / MIC-621A

