



ASTRI
2008

C2 Albireo

Technical Specifications and Frequency Response



Model	Albireo
Description	Stand-mounting speaker
Speaker System	2 way, 3 speakers
Enclosure Type	Bass Reflex, Rear Vented
Shielded Components	
Tweeter	25mm (1") Silk Dome
Midrange	
Woofer	2x130mm (5 1/4") Paper Cone
Freq. Response @ ±3dB	
on reference axis	42 – 22k Hz
on 30° axis	42 – 16k Hz
Crossover frequency	2.35 kHz
Slope	6 / 6 dB oct
Power handling	
on unclipped program	150W @ 8Ω
Recommended Amplifier	15-150W @ 8Ω
Sensitivity (2.83V/1m)	90 dB
Nominal Impedance	6 Ω
Minimum Impedance	4,2 Ω @ 250 Hz
Net Weight	14,8 kg
Shipping Weight	15,6 kg
Dimensions	565 x 178 x 323 mm
(H x W x D)	22"1/4 x 7" x 12"3/4
Shipping Dimensions	660 x 305 x 505 mm
(H x W x D)	26" x 12" x 19"7/8
Front finishes	Real wood
Cabinet finishes	Varnished Wood
FB	Beech / Blu
CA	Cherrywood / Ivory
NN	Walnut / Black

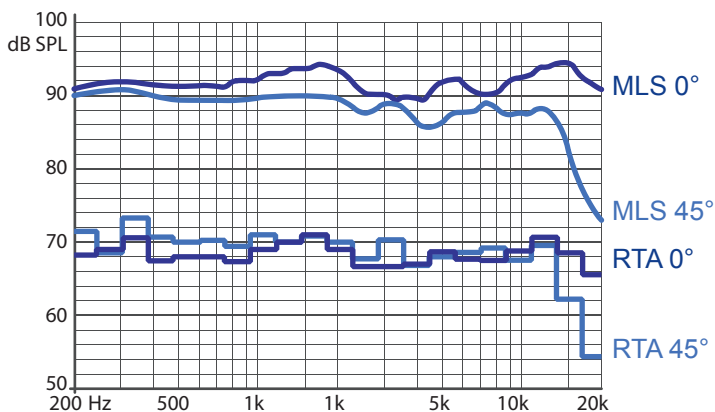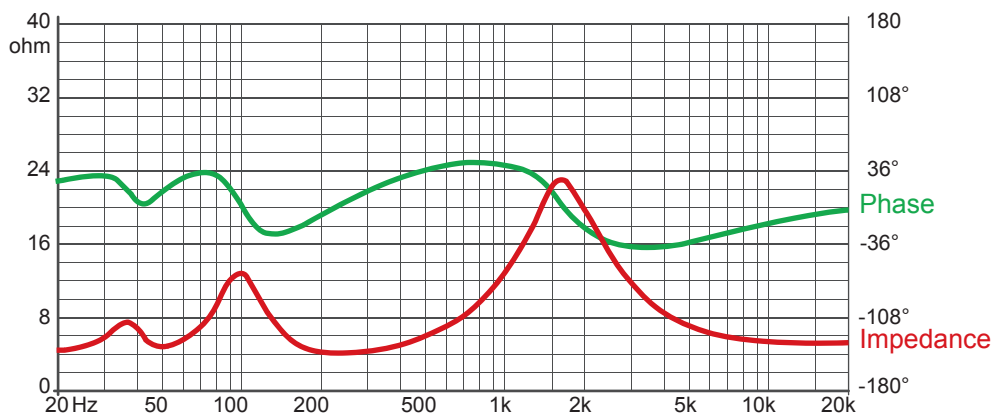

La risposta in frequenza è dichiarata a partire da 200Hz in quanto riteniamo che la risposta stessa venga influenzata in modo determinante dall'ambiente in cui sono posizionati i diffusori.

Frequency response is shown from 200Hz because the listenign room could have a big influence on the response of the loudspeakers.