

ASTRI
2008



C1 Deneb

Technical Specifications and Frequency Response



NN

Model	Deneb
Description	Bookshelf speaker
Speaker System	2 way system
Enclosure Type	Bass Reflex, Front Vented
Shielded Components	
Tweeter	25mm (1") Silk Dome
Midrange	
Woofer	130mm (5 1/4") PP Cone
Freq. Response @ ±3dB	
on reference axis	48 – 22k Hz
on 30° axis	48 – 16k Hz
Crossover frequency	2.35 kHz
Slope	6 / 6 dB oct
Power handling	
on unclipped program	100W @ 8Ω
Recommended Amplifier	10-100W @ 8Ω
Sensitivity (2.83V/1m)	89 dB
Nominal Impedance	6 Ω
Minimum Impedance	8 Ω @ 240 Hz
Net Weight	10,8 kg
Shipping Weight	11,6 kg
Dimensions	434 x 178 x 323 mm
(H x W x D)	17"1/8 x 7" x 12"3/4
Shipping Dimensions	660 x 305 x 505 mm
(H x W x D)	26" x 12" x 19"7/8
Front finishes	Real Wood
Cabinet finishes	Varnished Wood
FB	Beech / Blu
CA	Cherrywood / Ivory
NN	Walnut / Black

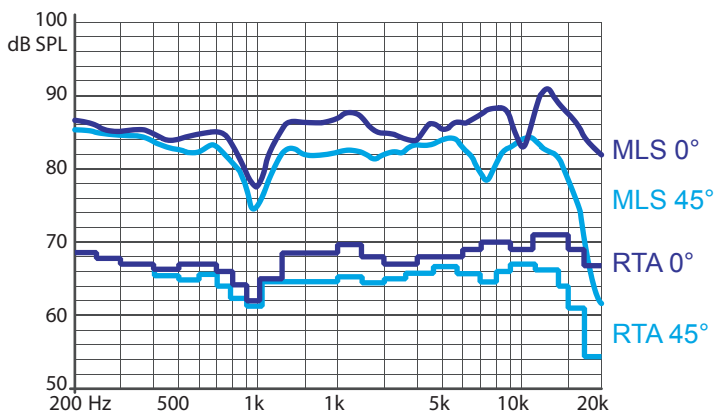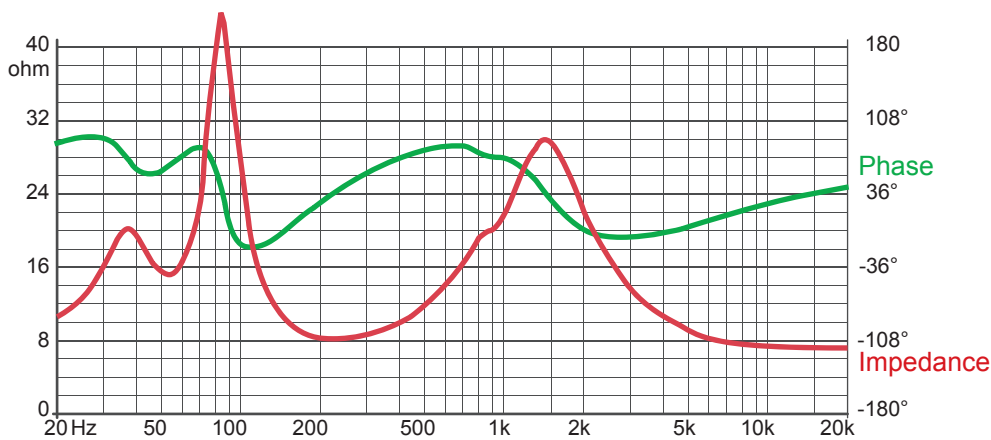

La risposta in frequenza è dichiarata a partire da 200Hz in quanto riteniamo che la risposta stessa venga influenzata in modo determinante dall'ambiente in cui sono posizionati i diffusori.

Frequency response is shown from 200Hz because the listenign room could have a big influence on the response of the loudspeakers.