


ASTRI  
2008

# C3 Schedir

Technical Specifications and Frequency Response



Model	C3 Schedir
Description	Floorstanding speaker
Speaker System	3 way system
Enclosure Type	Bass Reflex, Rear Vented
<b>Shielded Components</b>	
Tweeter	26mm (1") Fabric Dome
Midrange	15cm (5") Coated Paper Cone
Woofer	2x22cm (8") Coated Paper Cone
<b>Freq. Response @ ±3dB</b>	
on reference axis	29 – 25k Hz
on 30° axis	29 – 17k Hz
Crossover frequency	250 - 3.5k Hz
Slope	6 / 6-6 / 6 dB oct
<b>Power handling</b>	
on unclipped program	300W @ 8Ω
Recommended Amplifier	25-300W @ 8Ω
Sensitivity (2.83V/1m)	93 dB
Nominal Impedance	6 Ω
Minimum Impedance	4,1 Ω @ 110 Hz
Net Weight	35,0 kg
Shipping Weight	39,0 kg
Dimensions	1250 x 178 x 500 mm
(H x W x D)	49"1/4 x 7" x 19"11/16
Shipping Dimensions	1370 x 360 x 800 mm
(H x W x D)	54" x 14"3/16 x 31"1/2
Front finishes	Real Wood
Cabinet finishes	Varnished Wood / Black

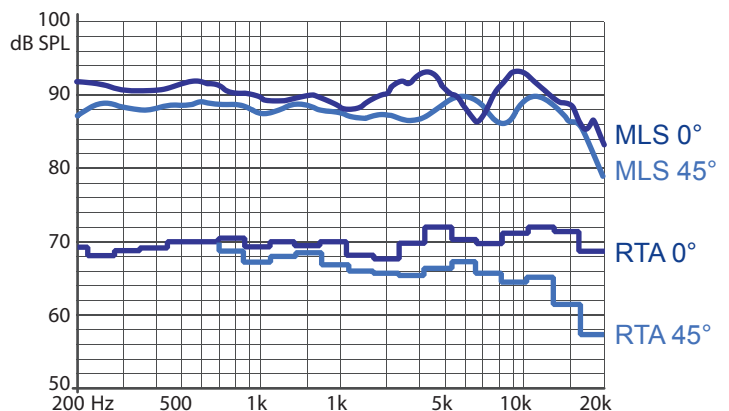

La risposta in frequenza è dichiarata a partire da 200Hz in quanto riteniamo che la risposta stessa venga influenzata in modo determinante dall'ambiente in cui sono posizionati i diffusori.

*Frequency response is shown from 200Hz because the listenign room could have a big influence on the response of the loudspeakers.*

