

3D-Ready AV Receiver with 7ch amplification. Supports 3D* and Audio Return Channel over HDMI, HD Audio decoding with CINEMA DSP enjoyment, YPAO and SCENE for ease-of-use.



High Sound Quality

- 7-channel powerful surround sound (735W=105W x 7 max for Europe, 630W=90W x 7 RMS, 805W=115W x 7 max)
- HD Audio format decoding: Dolby TrueHD and DTS-HD Master Audio; Dolby Digital Plus and DTS-HD High Resolution Audio
- Burr-Brown 192 kHz/24-bit DACs for all channels
- Direct Mode for high quality sound reproduction
- Assignable amplifiers for bi-amp connection

High Picture Quality

- Analogue video upscaling to full HD 1080p
- 1080p-compatible HDMI (4 in/1 out)
- Supports Deep Colour (30/36 bit), x.v.Colour, 24Hz Refresh Rate and Auto Lip-Sync compensation

Advanced Features

- SCENE buttons (BD/DVD, TV, CD and Radio) - quick and simple to use
- HDMI (V.1.4 with 3D* and Audio Return Channel)
- YPAO sound optimisation for automatic speaker setup
- HDMI CEC functionality
- Audio input assign capability for HDMI and component video input
- Ability to change HDMI input while in Standby Through mode

- iPod/iPhone compatibility with optional YDS-12 Universal Dock as well as iPod compatibility with optional YDS-11 Universal Dock
- iPod song titles displayed in English and Western European languages on the front panel and on-screen display
- Bluetooth (A2DP) compatibility with optional Yamaha Bluetooth® Wireless Audio Receiver YBA-10
- On-screen display
- Front panel mini jack for connecting portable audio player
- Initial Volume Setting and Maximum Volume Setting
- Audio Delay for adjusting Lip-Sync (0-240ms)
- 40-station preset tuning / Auto preset tuning
- Auto power down function with variable time setting
- Preset remote unit

Surround Realism

- HD Audio decoding with CINEMA DSP (17 DSP programmes)
- Adaptive DRC (Dynamic Range Control) and Adaptive DSP Level
- Compressed Music Enhancer
- SILENT CINEMA and Virtual CINEMA DSP



The RX-V567 offered with black, titanium and gold finish available in some areas.

* HDMI 3D feature will be available via firmware update.

AV Receiver RX-V567

NEW PRODUCT BULLETIN

Main Specifications

Audio Section	
Maximum Output Power per Channel (For Europe, 4 ohms, 1 kHz, 0.7% THD)	
Front L/R Channels	105 W/ch
Centre Channel	105 W
Surround L/R Channels	105 W/ch
Surround Back Channels	105 W/ch
Minimum RMS Output Power (6 ohms, 1 kHz, 0.9% THD)	
Front Channels	90 W/ch
Centre Channel	90 W
Surround Channels	90 W /ch
Surround Back Channels	90 W ch
Maximum Power (6 ohms, 1 kHz, 10% THD)	
Front L/R Channels	115 W/ch
Centre Channel	115 W
Surround L/R Channels	115 W/ch
Surround Back Channels	115 W/ch

Dynamic Power/Channel (Front L/R 6/4/2 ohms)	100/110/125 W
Input Sensitivity/Impedance (AV5, 1 kHz, 100 W/6 ohms)	200mV/47 k-ohms
Output Level/Impedance	Rec Out 200 mV/1.2 k-ohms Subwoofer 1 V/1.2 k-ohms
Frequency Response (AV5, Front Ch)	10 Hz-100 kHz +0, -3 dB
Total Harmonic Distortion (AV5, 1 kHz, 50 W/6 ohms)	0.06%
Signal-to-Noise Ratio (AV5, Direct, 250 mV)	100 dB
Video Section	
Video Monitor Out Frequency Response Component Video Signal	5 Hz-60 MHz -3 dB
Tuner Section	
FM 50dB Quieting Sensitivity	Mono 3 µV [20.8 dBf]
FM Signal-to-Noise Ratio	Mono / Stereo 74 dB / 69 dB
General	
Standby Power Consumption (HDMI Off, Standby Through Off)	0.2 W
Dimensions (W x H x D)	435 x 151 x 364 mm
Weight	8.5 kg

YDS-12 Universal Dock for iPod


The optional YDS-12 Universal Dock lets you connect your iPod or iPhone to the receiver.



iPhone not included

Yamaha Bluetooth® Wireless Audio Receiver

The optional YBA-10 Bluetooth Wireless Audio Receiver docks to the receiver and supports A2DP audio streaming, so users can enjoy music wirelessly from Bluetooth-enabled mobile phones, Windows PCs and Macs.

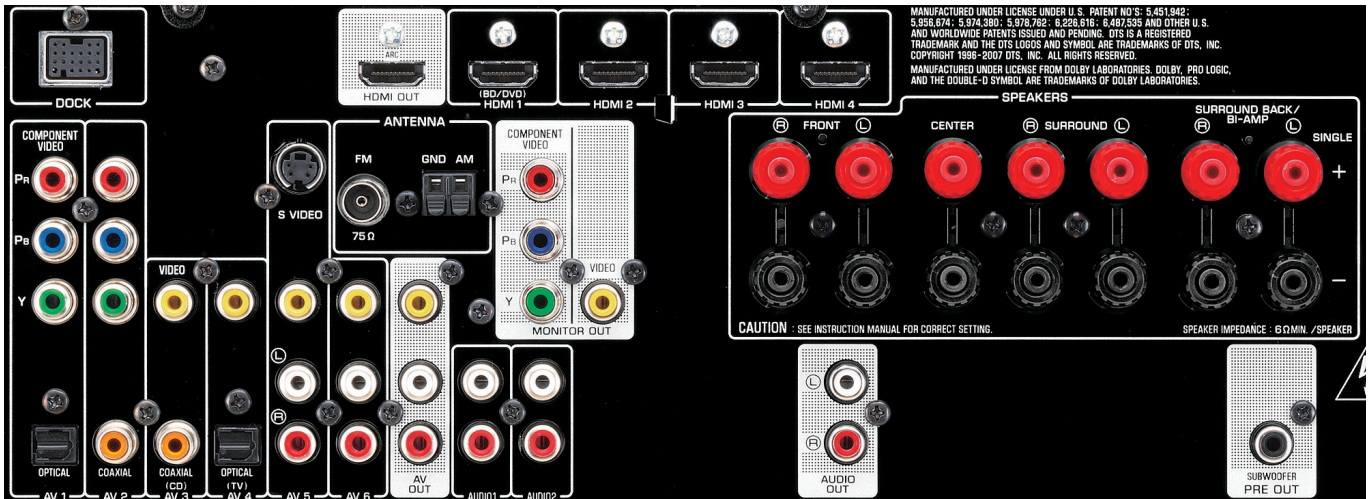

Extensive Connections

Inputs	
HDMI (Audio Input Assignable)	4
Radio Antenna (FM/AM)	1 / 1
Dock Terminal for Optional Dock Accessories	1
Optical Digital (Fixed)	2
Coaxial Digital (Fixed)	2
Analogue Audio*	5
S-Video (European Model only)	1
Component Video (Audio Input Assignable)	2

* Including front panel terminals.

Outputs	
HDMI	1
Analogue Audio	2
Component Video Monitor	1
Composite Monitor	1
Composite AV	1
Speaker (without subwoofer)* / **	7ch
Subwoofer	1

* Assignable for surround back L/R to bi-amp (front L/R).

** Banana-plug compatible speaker terminals are available in some areas.

• "Made for iPod" means that an electronic accessory has been designed to connect specifically to iPod and has been certified by the developer to meet Apple performance standards. • "Works with iPhone" means that an electronic accessory has been designed to connect specifically to iPhone and has been certified by the developer to meet Apple performance standards. • Apple is not responsible for the operation of this device or its compliance with safety and regulatory standards. • The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. • Dolby and the double-D symbol are registered trademarks of Dolby Laboratories. • DTS is a registered trademark and the DTS logos, Symbol, DTS-HD and DTS-HD Master Audio are trademarks of DTS, Inc. • HDMI, the HDMI logo and High-Definition Multimedia Interface are trademarks or registered trademarks of HDMI Licensing LLC. • Burr-Brown products are trademarks of Texas Instruments, Inc. • "x.v.Color" is a trademark of Sony Corporation. • CINEMA DSP is a trademark of Yamaha Corporation. • SILENT CINEMA is a trademark of Yamaha Corporation. • Product designs and specifications are subject to change without notice.