

VS4



DVDO's VS4 Four-Input HDMI Switch/Repeater


A high-performance switching hub ideal for the new generation of HDMI digital displays and AV sources.

With integrated automation control capability, and full-performance 165 MHz signaling speed capability, the DVDO VS4 is the answer to many of your HDMI installation and performance problems, featuring robust, bullet-proof compatibility for the new 1080p display resolution.

The DVDO VS4 is a sleek, compact, high-performance 4-input HDMI™ source selector. It is designed for use in home theater, HDTV, Digital Television, and personal computer digital video and audio switching applications. The VS4 accepts output from up to four HDMI sources, such as DVD players, personal video recorders, PCs, and set-top boxes, and enables selection of one output to be sent on to an HDMI-enabled TV, display, or AV receiver.



VS4 Four-Input HDMI Switch/Repeater

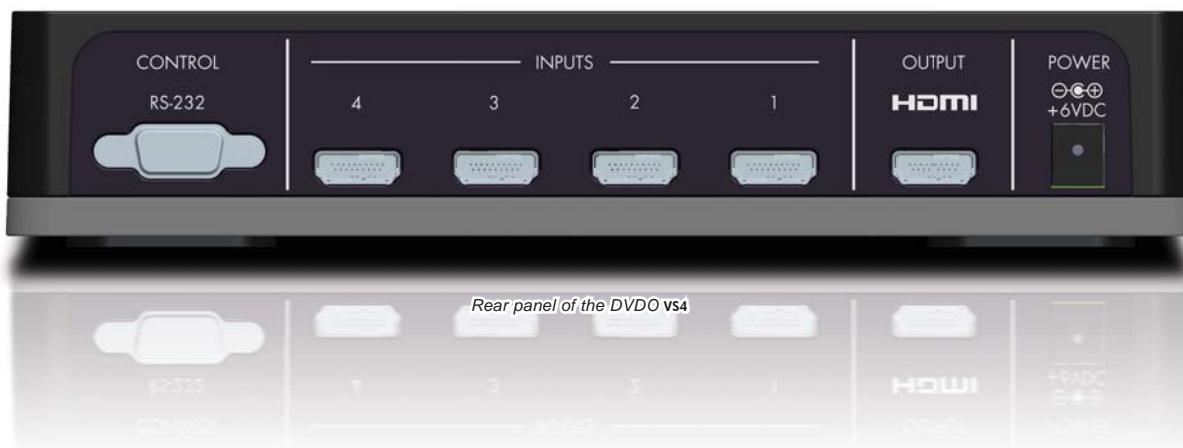

Technical Specifications

- Four input, one output HDMI source switch and repeater
- Full 1080p and UXGA signal compatibility – 1080p Ready
- Comprehensive HDCP support for best-in-class compatibility
- Full-Performance 165MHz signal speed capability
- Maximum compatibility with all types of HDMI and DVI devices
- Switches and repeats HDMI, HDMI/HDCP, DVI, and DVI/HDCP between any device or type – DVD, PC, STB, HDTV, AV receiver
- Input and output cable length capability to 50 feet each way
- Doubles as a cable extender for long cable lengths - up to 100 feet total
- Sleek, compact, one-half-width single rack mountable enclosure
- Comprehensive automation system control via IR remote and RS-232 serial port interface
- Integrated IR remote control storage
- Comes standard with two IR remotes Consumer (toggle), and Pro (direct access)
- Power supply features EcoSmart® Technology by Power Integrations – meets California Energy commission, EnergyStar, and EU standards
- HDMI ATC compliance-tested and certified
- Full product safety and FCC compliance tested and certified
- Sole plate ballast weighting to avoid tilt or tip when heavy cables attached
- Dimensions: 8.44"W x 5.50"D x 1.68"H
- Power requirements: 100-240VAC, 50/60Hz
5W max. operating, 1W max. standby



*Infrared Remote Control with Discrete codes
(Pro and Consumer Models)*



DVDO by Anchor Bay Technologies, Inc.

300 Orchard City Drive
Mailstop 131
Campbell, CA 95008

Phone 408.379.3836
Fax 408.379.3845
Toll Free 866.423.DVDO
Email Sales@DVDO.com
www.dvdo.com